

PCT

WORLD INTELLECTUAL PROP  
International E

INTERNATIONAL APPLICATION PUBLISHED UNDEI

WO 9607928A1

(51) International Patent Classification 6:

G01S 1/24

A1

(11) International Publication Number:

WO 96/07928

(43) International Publication Date:

14 March 1996 (14.03.96)

(21) International Application Number: PCT/US95/11047

(22) International Filing Date: 29 August 1995 (29.08.95)

(30) Priority Data:

08/300,909

6 September 1994 (06.09.94)

US

(71) Applicant: THE REGENTS OF THE UNIVERSITY OF CALIFORNIA [US/US]; 22nd floor, 300 Lakeside Drive, Oakland, CA 94612 (US).

(72) Inventor: McEWAN, Thomas, E.; 1734 Cairo Street, Livermore, CA 94550 (US).

(74) Agent: SARTORIO, Henry, P.; P.O. Box 808, L-703, Livermore, CA 94550 (US).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).


Published

With international search report.

(54) Title: TIME-OF-FLIGHT RADIO LOCATION SYSTEM

## (57) Abstract

A bi-static radar configuration measures the direct time-of-flight of a transmitted RF pulse and is capable of measuring this time-of-flight with a jitter on the order of about one pico-second, or about 0.01 inch of free space distance for an electromagnetic pulse over a range of about one to ten feet. A transmitter (53) transmits a sequence of electromagnetic pulses in response to a transmit timing signal, and a receiver (58) samples the sequence of electromagnetic pulses with controlled timing response to the samples. A timing circuit supplies the transmit timing signal to the transmitter and supplies the receive timing signal to the receiver. The receive timing signal causes the receiver to sample the sequence of electromagnetic pulses such that the time between transmission of pulses in the sequence and sampling by the receiver sweeps over a range of delays.

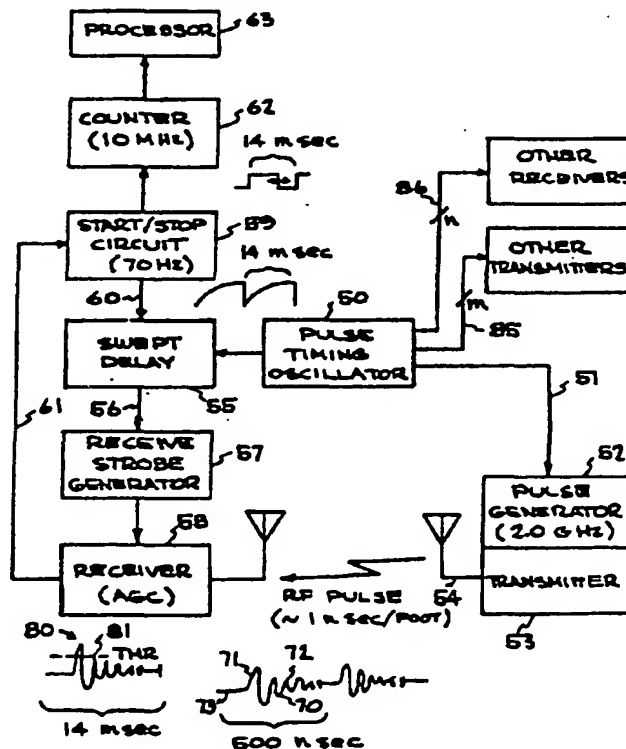

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## TIME-OF-FLIGHT RADIO LOCATION SYSTEM

5 The United States Government has rights in this invention pursuant to Contract Number W-7405-ENG-48 between the United States Department of Energy and the University of California for the operation of Lawrence Livermore National Laboratory.

### BACKGROUND OF THE INVENTION

#### Field of the Invention

10 The present invention relates to high resolution position measurement systems, and more particularly to sub-millimeter resolution time-of-flight radio location systems operating over a range of less than about ten feet.

#### Description of Related Art

15 There are a wide variety of position-sensing technologies available which rely on non-mechanical technologies, such as the following:

- (1) Infrared or optical systems that employ TV cameras and complex video tracking algorithms;
- 20 (2) Ultrasound systems; and
- (3) Continuous wave (CW) radio frequency fringe counting and phase measurements systems.

25 The infrared or optical systems are very expensive and, therefore, are impractical for most commercial applications of position sensing. The ultrasound systems are quite inaccurate and unreliable. The CW radio frequency fringe counting and phase measurement systems suffer severe multi-path problems and ambiguities in the position-sensing data. None of these prior systems provide high resolution, and all are quite expensive.

High resolution, low-cost position-sensing can be applied to the interactive media arts, robotics, automotive occupant position sensing, digital surgery and a wide variety of applications where high resolution position sensing is desired.

5

#### SUMMARY OF THE INVENTION

The present invention is based on a bi-static radar configuration which measures the direct time-of-flight of a transmitted RF pulse. This system is capable of measuring time-of-flight with a jitter on the order of  
10 about one pico-second, or about 0.01 inch of free space distance for an electromagnetic pulse, over a range of about one to ten feet or more. The system can be implemented with very low-cost components, so it can be used in high-volume computer games and virtual reality systems.

The invention can be characterized as an apparatus for measuring  
15 time-of-flight of an electromagnetic pulse. This apparatus is comprised of a transmitter, which transmits a sequence of electromagnetic pulses in response to a transmit timing signal, and a receiver, which samples the sequence of electromagnetic pulses with controlled timing in response to a receive timing signal and generates a sample signal in response to the  
20 samples. A timing circuit supplies the transmit timing signal to the transmitter and supplies the receive timing signal to the receiver. The receive timing signal causes the receiver to sample the sequence of electromagnetic pulses such that the time between transmission of pulses in the sequence and sampling by the receiver sweeps over a range of  
25 delays. A sample signal produced by the detection circuitry indicates the time-of-flight between the transmitter and the receiver of pulses in the sequence in response to the sample signal and the timing circuit. The receive timing signal sweeps over the range of delays in a sweep cycle

such that pulses in the sequence are sampled at the pulse repetition rate, and with different delays in the range of delays to produce a sample signal representing magnitude of a received pulse in equivalent time. Automatic gain control circuitry in the receiver controls the magnitude of the equivalent time sample signal. A signal processor analyzes the sample signal to indicate the time-of-flight of the electromagnetic pulses in the sequence. For instance, the system may include a pulse detection signal which generates a pulse detect signal in response to the sample signal when the sample signal reaches a threshold during a sweep over the range of delays. The time between beginning of a sweep and generation of the pulse detect signal indicates the time-of-flight of the pulses in the sequence.

In one aspect of the invention, the timing circuit includes a pulse-rate clock, a cable, having a known cable delay time connecting the pulse-rate clock to the transmitter, and a circuit in the transmitter which translates the pulse-rate clock from the cable into the transmit timing signal. A controlled delay circuit coupled with the pulse-rate clock produces the receive timing signal at the receiver in response to the pulse-rate clock, delayed in time to compensate for the cable delay time.

The receive timing signal can be produced using a controllable delay circuit that includes a voltage controlled delay circuit. A voltage ramp generator coupled to the control input of the voltage controlled delay circuit causes a sweep in the delay of the receive timing signal. The voltage ramp generator may be implemented using a digital-to-analog converter, or using analog ramp generators. In one embodiment, an analog ramp generator is used, which has an exponential transfer characteristic, and the voltage controlled delay circuit implements a complimentary exponential delay in

response to the control input to provide a nearly linear delay over the range of delays.

5 The system may include a plurality of receivers spaced away from one another, such that the position of the transmitter can be detected with several degrees of freedom.

The invention can also be characterized as a method for detecting the position of an object at a range of less than about ten feet. The method is comprised of the following steps:

- 10 (1) mounting a transmitter on the object;
- (2) transmitting from the transmitter a sequence of electromagnetic pulses;
- (3) detecting time-of-flight of the electromagnetic pulses from the transmitter to the receiver; and
- (4) processing the time-of-flight to indicate the position of the object.

15 The step of detecting time-of-flight includes sampling the sequence of pulses with controlled timing to produce an equivalent time representation of a transmitted pulse at the receiver, and processing the equivalent time signal to indicate the time-of-flight.

20 As mentioned above, the present invention operates over a range of time-of-flights of less than ten nanoseconds with excellent accuracy. The system according to the present invention can be implemented with sub-millimeter sensitivity over a range of less than ten feet.

25 Other aspects and advantages of the present invention can be seen upon review of the figures, the detailed description and the claims which follow.

### BRIEF DESCRIPTION OF THE FIGURES

Fig. 1 is a simplified diagram of a position sensor based on direct time-of-flight measurements of electromagnetic pulses according to the present invention.

5 Fig. 2 is a block diagram of the position sensor according to the present invention.

Fig. 3 is a more detailed functional block diagram of a receiver and transmitter in a position detector according to the present invention.

10 Fig. 4 is an electrical schematic diagram of a timing circuit and other parts of a position sensor according to the present invention.

Fig. 5 is an electrical schematic diagram of a transmitter for a position sensor according to the present invention.

Fig. 6 is an electrical schematic diagram of a receiver for a position sensor according to the present invention.

15 Fig. 7 is a simplified diagram of a head position sensing system implemented according to the present invention.

### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

20 A detailed description of preferred embodiments of the present invention is provided with reference to the figures, in which Fig. 1 provides an illustration of the basic concept. In particular, a position sensor according to the present invention includes a transmitter 10 which is mounted on an object 11, the position of which is to be sensed. The transmitter 10 generates a sequence of RF pulses 12 in response to a  
25 transmit timing signal supplied across a timing cable 13 from a control circuit 14. The receiver 15 coupled to the control circuit 14 includes a sample circuit which samples the RF pulse with controlled timing in response to a receive timing signal. The sensor control circuit 14 supplies

the receive timing signal through a controlled delay circuit 16 to the receiver 15 so that the sequence of electromagnetic pulses are sampled with a time between transmitting of pulses from the transmitter 10 and sampling by the receiver 15 precisely controlled and swept over a range of delays. The receiver generates a sample signal on line 17, which is supplied to the sensor control circuit 14 which detects a characteristic of the sample signal to indicate a time-of-flight of the RF pulses 12 from the transmitter 10 to the receiver 15. In the system illustrated in Fig. 1, a first additional receiver 18 and a second additional receiver 19 are included in the system. The receivers 18 and 19 are connected to the control circuit 14 by timing cables 20 and 21, respectively, and also sample the RF pulses 12 with controlled timing. The time-of-flight detected in response to the receivers 15, 18 and 19 can be processed to indicate the position of the object 11 with a number of degrees of freedom and with excellent resolution according to the present invention. Also the range indicated by bracket 22 between the transmitter 10 and the receivers 15, 18, 19 may be less than 10 feet.

The operation of the sensor according to the present invention can be better understood with respect to the block diagram in Fig. 2. The system is based on a pulse timing oscillator 50 which generates a clock at a pulse repetition rate of about two megaHertz in the example to be illustrated with respect to Fig. 2. The pulse rate clock generated by the pulse timing oscillator is supplied across a cable 51 to a pulse generator 52 in the transmitter. The pulse generator generates an RF pulse, such as centered at nominally 2.0 gigaHertz, which is transmitted by the transmitter 53 through antenna 54 with the pulse repetition rate of about two megaHertz.



The pulse timing oscillator 50 is also coupled to a controlled delay circuit 55. The controlled delay circuit 55 supplies a receive timing signal on line 56 to a receive strobe generator 57. The receive strobe generator 57 strobes a sample gate in the receiver 58 at the pulse repetition rate, but at times which are delayed relative to the time that the transmitter emits the RF pulse.

The controlled delay circuit 55 is controlled by a start/stop circuit 59 which includes a sweep oscillator which oscillates at about 70 Hertz in the example described. Thus, the sweep oscillator is designed to oscillate at less than 100 Hertz. An alternative system may be implemented which sweeps at about 16 kiloHertz to be compatible with NTSC video. This oscillator supplies a ramp signal on line 60 to the swept delay circuit 55 to control the timing of the strobes generated by the strobe generator 57. The start/stop circuit 59 generates a start signal at the beginning of each sweep, and a stop signal in response to a pulse detect signal on line 61. The pulse detect signal on line 61 is generated by the receiver 58 in response to the samples of the sequence of RF pulses. When the receiver 58 detects the RF pulse, the pulse detect signal on line 61 causes the start/stop circuit 59 to issue a stop signal. The start signal is used to initiate counter 62 and the stop signal is used to stop the counter 62. The counter begins counting at a count rate of about 10 megaHertz in the example illustrated at the beginning of each sweep, and stops counting upon receiving the stop signal. Thus, the value in the counter 62 upon receiving the stop signal indicates the time-of-flight of an RF pulse from the transmitter to the receiver (the difference between the delay of a strobe pulse at the beginning of a sweep and the delay of a strobe pulse when the pulse detect signal is generated). This value is supplied to processor 63 which uses the information to determine the position of the transmitter 53.

Thus, in the example illustrated, with a 70Hertz start/stop circuit, a ramp which lasts about 14 milliseconds is produced. The delay between the transmission of an RF pulse by the transmitter, and strobing of the receiver by the receive strobe generator, sweeps over a range in response to the ramp. With a two megaHertz pulse repetition rate, the time between pulses is about 500 nanoseconds. The delay between transmission by the transmitter and reception by the receiver for a 10-foot propagation would be about 10 nanoseconds. Thus, the timing of the receive strobe generated by the receive strobe generator can be swept over a range of delays which begin at a time compensating for cable delay to the transmitter and varies by about 10 nanoseconds in order to precisely detect the position of the transmitter. With a ramp lasting 14 milliseconds, and a pulse repetition rate of two megaHertz, the receiver will sample about 28,600 pulses per sweep of the delay circuit 55.

As illustrated in Fig. 2, the RF pulses at the receiver may have an amplitude which varies as illustrated by trace 70. The 2.0 gigaHertz pulse generator will have a cycle time of about 500 picoseconds, with a rise time on the leading edge of less than 100 picoseconds. The leading edge of the pulse will appear as a strong pulse as indicated at point 71. The strong pulse will be followed by a noise region, generally 72, which is based on reflections and other effects of the transmitted pulse. By the time the second pulse is generated, the noise will have died to a low level as indicated by the region 73 at the beginning of a real-time pulse cycle.

This real-time pulse will be sampled over a range of delay times, such that an equivalent time signal, as illustrated at trace 80, is produced. This trace will assume the shape of the average pulse, however, with a repetition cycle of 70 Hertz for an equivalent time sample width of 14 milliseconds. The equivalent cycle time of the pulse will be about 700

microseconds, for an equivalent time pulse frequency of about 1.4 kiloHertz. Thus, the receiver includes an audio-frequency amplifier with automatic gain control, and a threshold detector. Upon detection of the threshold, such as indicated at point 81, the pulse detection signal is generated on line 61.

Also as illustrated in Fig. 2, the pulse timing oscillator 50 can be connected to other transmitters, such as across cables 85 and other receivers, such as across cables 86 to produce a sophisticated position-detecting system.

The pulse timing oscillator 50 can be frequency modulated, or dithered, for the purpose of reducing interference from similar systems, or other RF devices.

Fig. 3 provides a more detailed schematic diagram of a time-of-flight sensor according to the present invention. In the embodiment of Fig. 3, the pulse repetition frequency of about 2.5 megaHertz is shown, which is generated by a 10 megaHertz clock 100 connected to a divide-by-four circuit 101. The output of the divide-by-four circuit 101 provides a pulse rate clock on line 102. This signal is supplied to a driver 103 coupled to a timing cable 104. The timing cable is connected to the transmit unit, which includes a driver 105, a pulse-forming network 106 which is responsive to the driver 105, and a microwave oscillator 107 which generates, for example, a two gigaHertz, gated RF pulse on line 108. Line 108 is coupled to a transmit antenna 109 which transmits the RF pulse 110 to a receive antenna 111.

The pulse timing signal on line 102, is supplied as a trigger signal to a voltage controlled delay circuit 112. The output of the voltage controlled delay circuit on line 113 drives a pulse-forming network 114 which is used to strobe a sample-and-hold gate 115, which is connected





to receive antenna 111 and supplies a sample of the transmitted pulse to a holding capacitance 116. The holding capacitance drives an amplifier 117 to produce a sample signal on line 118. The sample signal is supplied to a comparator 119 which compares the sample signal against a threshold 120. Also, the sample signal line 118 drives a peak-detect circuit 139 which is based on a diode 120 and capacitor 121. The output of the peak-detect circuit is supplied to an amplifier 122 which provides automatic gain control to the amplifier 117. The automatic gain control amp includes an input resistor 123 which is connected to the first input of a differential amplifier 124. The second input of differential amplifier 124 is connected to a reference voltage 125. Capacitor 126 is connected in feedback across the amp 124.

The voltage controlled delay circuit is controlled in response to a ramp signal on line 127, which is supplied by ramp generator 128. The ramp signal on line 127 causes the voltage controlled delay to sweep over a range of delays which corresponds to the delay of the timing cable 104 plus a range of expected time-of-flights from the transmit unit to the receiver. This ramp generator 128 is driven by a ramp clock 130. The ramp clock in the example illustrated is generated by dividing the pulse repetition frequency on line 102 by  $2^{16}$  to produce a 40 Hertz signal on line 131. The 40-Hertz signal is coupled to a binary storage element 132. On the leading edge of the ramp clock, the output of the binary 132 is set high, enabling the AND gate 133 to supply the 10 megaHertz clock to a range counter 134. The range counter counts up at the 10 megaHertz rate until the comparator 119 detects that the sample signal on line 118 exceeds the threshold. At that point, the binary storage element 132 is reset, disabling the AND gate 133 and turning off the range counter 134. The data in the range counter can then be supplied out across bus 135 to the signal

processor. Also, on the leading edge of each 40 Hertz ramp, a reset signal is supplied to control circuit 136 which resets the counter 134 for a subsequent sweep. Thus, in Fig. 3, a 2.5 megaHertz repetition frequency is derived from the 10 megaHertz clock. The pulse repetition frequency  
5 drives the transmit unit through the timing cable, which may be implemented with low-cost phonocables that carry DC power as well as the clock. The transmitter comprises a pulse forming network (PFN) that modulates a gated RF oscillator to generate one cycle of RF as shown at, for example, two gigaHertz center frequency. The RF monocycle  
10 propagates from the transmit antenna to the receive antenna. A sample hold circuit in the receive unit samples the receive signal when driven with a gate pulse derived from the voltage controlled delay circuit and a pulse-forming network. The hold circuit output is amplified by an automatic gain controlled amplifier and applied to a threshold comparator. The output of  
15 the amplifier 117 is an equivalent time replica of the RF pulse that repeats at a 40 Hertz rate, the sweep rate of the ramp generator.

A peak detector detects the maximum pulse amplitude in the equivalent time sample signal and drives an automatic gain control amplifier to maintain the peak amplitude of the equivalent time pulse at a  
20 controlled level, typically -1 peak volts in this example. The comparator is typically set to -.5 volts to detect the equivalent time pulse at a precise, constant percentage with a maximum level regardless of fluctuation caused by time-of-flight range or antenna orientation.

The equivalent time signal represents a range sweep from one to  
25 ten feet as defined by the ramp circuit and the voltage controlled delay circuit. When the ramp starts its sweep, a binary is toggled to start the range counter by gating the 10 megaHertz clock into the range counter. At the point in the sweep where the equivalent time pulse is precisely

detected, the range counter is stopped, leaving the exact range count for readout. This cycle is repeated at a 25 millisecond rate. With a 10 megaHertz count rate, 250,000 counts represent full scale, or ten feet, so the digital resolution is in the neighborhood of .0006 inches. However, present systems are analog-noise limited to about .01 inches at the 25 millisecond update rate. Digital averaging may be employed to decrease jitter.

The voltage controlled delay circuit 112 generates a linear-range sweep over time by employing a primitive exponential, high-speed voltage ramp with the time constant of about 10 nanoseconds. This ramp is combined with a primitive exponential ramp in the ramp circuit. Both the real-time ramp and the equivalent-time ramp operate over the same portions of their curves to jointly provide a linear sweep.

A representative electrical schematic diagram of another example of a receiver, transmitter and timing circuit are illustrated in Figs. 4 through 6. Fig. 4 illustrates the timing circuit for the system according to the present invention.

The timing circuit includes a 70 Hertz oscillator, which is formed using NAND gates 200 and 201 which have their inputs connected together to operate as inverters. The first NAND gate 200 has its output connected to the input of the second NAND gate 201. The second NAND gate 201 is connected through a capacitor 202 in feedback to the input of the first NAND gate 200. Also, the output of NAND gate 200 is connected through resistor 203 to its input. This 70 Hertz clock is connected to a flip-flop through the RC differentiator composed of capacitor 204 and resistor 205, which is connected to the positive five-volt supply. The flip-flop is based on NAND gate 206 and NAND gate 207. The output NAND gate 206 is connected to one input of NAND gate 207. The output of NAND



gate 207 is connected to one input of NAND gate 206. The first input of NAND gate 206 is the output of the RC circuit based on capacitor 204 and resistor 205. The second input to NAND gate 207 is the output of a threshold detection circuit at node 208. The threshold detection circuit at node 208 is composed of resistor 209, which is connected to receive the sample signal, RX, generated by the receiver described in Fig. 6, and resistor 210, which is connected to the positive five-volt supply.

The output of the flip-flop composed of NAND gates 206 and 207 is supplied through resistor 211 to connector 212. The connector 212 drives the signal processor, which is composed of counter 213 and memory 214. A 10 megaHertz clock 215 drives a NAND gate 216. The second input to the NAND gate 216 is the signal from connector 212, which enables and disables the output of the NAND gate 216 to drive the counter 213. Also, the signal from connector 212 is used as a read strobe for the memory on line 215, and a reset signal on line 216 for resetting the counter by appropriate control circuitry. Thus, the counter is enabled at the beginning of each cycle of the oscillator composed of NAND gates 200 and 201, and turned off when the received sample signal RX falls below a negative threshold.

The system in Fig. 4 also shows the pulse clock composed of inverter 220 and inverter 221. The output of inverter 220 is connected through resistor 222 to its input. The output of inverter 221 is connected through capacitor 223 to the input of inverter 220. The output of inverter 221 is a 2 megaHertz clock on line 224. This signal is supplied through inverter 225 to node 226. Capacitor 227 is connected between node 226 and ground. Capacitor 228 is connected between node 226 and a transmit cable 229 such as an RCA phono plug coupled to a 12-foot coaxial audio-cable. Also, inductor 230 is coupled from cable 229 to the positive five-volt

supply in order to supply power to the transmitter across the cable 229 superimposed with the transmit clock.

5 The pulse clock on line 224 is also supplied to a delay circuit which is connected to line 224 through resistor 231. Resistor 231 is connected to the input of inverter 232 and through variable capacitor 233 to ground. The variable capacitor 233 provides a coarse delay for the pulse clock. The output of inverter 232 is supplied through resistor 234 to the input of inverter 235. The input of inverter 235 is also driven by the ramp generator, generally 246. The output of inverter 235 is supplied through inverter 236 to the receive strobe generator through capacitor 237. 10 Capacitor 237 is connected between the output of inverter 236 and node 238. Diode 239 has its anode connected to node 238 and its cathode connected to ground. Resistor 240 is connected between node 238 and the five-volt supply. Node 238 is also connected to the emitter of high-speed transistor 241. The base of transistor 241 is coupled to ground. The collector of transistor 241 supplies the strobe signal STB on line 242. Also, the collector of transistor 241 is connected through resistor 243 to the positive five-volt supply.

20 The ramp generator 246 is basically an analog exponential ramp generator. This ramp generator may be replaced by a digital-to-analog converter which digitally supplies a sequence of analog values to the input of inverter 235 to control the delay using synchronous oscillators. In the analog version illustrated, the 70 Hertz clock at the output of the NAND gate 200 is supplied on line 250 through resistor 251 and the capacitor 252 to the base of transistor 253. Also resistor 254 is connected from the base of transistor 253 to ground. Emitter of transistor 253 is coupled to ground. 25 The collector of transistor 253 is connected through resistor 255 to the positive five-volt supply. Also the collector is coupled through capacitor

256 to ground. Resistor 257 is connected from the positive five-volt supply to the input of inverter 235. Resistor 258 is connected from the collector of transistor 253 to the input of inverter 235. Also, controllable capacitor 259 is connected from the input of inverter 235 to ground. This circuit serves to bias the input of inverter 235 to a region in which it has an exponential transfer function. The ramp generator 246 generates a complimentary exponential transfer function to provide overall a linear ramp in delay at the output of inverter 235. Fine control over the span of the range of delays produced is provided by the adjustable capacitor 259.

Also illustrated in Fig. 4 is a battery-based power supply. The power supply includes a battery 270. The battery is connected to a switch 271 which drives level translators 272 and 273 to provide isolated five-volt supplies for the circuit.

Although the transmit timing signal and the receive timing signal are produced using a single clock in the embodiment described, alternative systems may employ timing circuits which have separate synchronized clocks located at the receiver and transmitter, respectively, without a cable tether.

Fig. 5 illustrates the implementation of a transmitter according to the present invention. This transmitter includes a connector 300 which can be connected to the cable 229 illustrated in Fig. 4. This cable supplies DC power and the transmit clock to a pulse-forming network in the transmitter. Thus, connector 300 is coupled through inductor 301 to line 302. Also, the connector 300 is connected through capacitor 303 to node 304. Resistor 305 is connected from node 304 to line 302. Diode 306 has its cathode coupled to node 304 and its anode coupled to ground. Diode 307 has its anode coupled to node 304 and its cathode coupled to line 302. Line 302 is coupled through capacitor 308 to ground. Node 304 is coupled through

inverters 309 and 310 in series which shape the incoming signal. The output of inverter 310 is supplied through capacitor 311 to node 312. The anode of diode 313 is coupled to node 312. The cathode of diode 313 is coupled to ground. Node 312 is connected through resistor 314 to line 302. Also, node 312 is connected through resistor 315 to the emitter of a high-speed transistor 316. The base of high-speed transistor 316 is connected through inductor 317 to ground. Collector of transistor 316 is connected to the transmit antenna 318. Also, the collector is coupled through inductor 319 to node 320. Node 320 is coupled through resistor 321 to line 302 and across capacitor 322 to ground. The transmit antenna 318 is connected through resistor 323 and capacitor 324 to ground. Thus, the transmitter generates a short burst of radio frequency energy at the transmit antenna 318. The antenna may be a vertically polarized antenna, a circularly polarized antenna, antennae based on cross-dipoles or other implementations known in the arts. Also, the antenna may be dithered or otherwise maneuvered to improve sensitivity of the receiver.

The use of the pulsed RF system has a very low average power, complying with FCC Part 15 regulations.

Fig. 6 illustrates a receiver for use with the system of the present invention. The receiver includes a receive antenna 350 and a single diode sample gate based on diode 351. The cathode of diode 351 is connected to the receive antenna 350. Also, the strobe signal from line 242 of Fig. 4 is supplied through capacitor 352 to the cathode of diode 351. Resistor 353 is coupled from the cathode of diode 351 to ground. The anode of diode 351 is coupled to node 354. Capacitor 355 holds the sampled voltage between node 354 and ground. A resistor 356 is coupled from node 354 to the positive five-volt supply. Node 354 is connected through capacitor 356 to the base of transistor 357. The emitter of transistor 357

is connected to ground. A resistor 358 is connected in feedback from the collector of transistor 357 to its base. The collector of transistor 357 is connected through capacitor 398 to a sequence of audio amplifiers beginning with inverter 359, having resistor 360 in feedback. The output of inverter 359 is connected through capacitor 361 and resistor 362 to the input of inverter 363. Inverter 363 has resistor 364 and capacitor 365 connected in parallel in feedback from the output to the input. Also, the output of inverter 363 is connected through capacitor 366 and resistor 367 of the input of inverter 368. Inverter 368 has resistor 369 and capacitor 370 connected in feedback in parallel. The output of inverter 368 is an equivalent time sample signal on line 371. This signal is supplied across resistor 372 to the input of inverter 373. The output of inverter 373 is supplied to the anode of diode 374. The cathode of diode 374 is connected to node 375, which is connected across capacitor 376 to ground. Also, a resistor 377 is connected from node 375 to the input of inverter 373. Node 375 is connected through resistor 378 to the input of inverter 379. Inverter 379 has capacitor 380 in feedback and its input is connected across resistor 381 to ground. The output of inverter 379 is connected through resistor 382 to the collector of transistor 357 and provides automatic gain control for the amplifier sequence in response to the voltage generated on capacitor 376.

The equivalent time signal on line 371 is also connected through capacitor 383 and resistor 384 to node 385. Node 385 is connected across capacitor 386 to ground and resistor 387 to ground. It is also connected to a video output connector 388 for connection to an analyzing circuit.

The signal on line 371 is supplied as the equivalent time signal RX to the threshold detector shown in Fig. 4.

The values of the resistors and capacitors are illustrated in Figs. 4 through 6 for the example circuit shown. The NAND gates are 74HC00 and the inverters are 74AC04, except in the receiver in which the inverters are implemented using MC14069UB inverters.

5           The sample circuit uses a single-ended, single diode sample gate, which operates with low power and high efficiency for sampling the small signals at the fast rate required by the present invention. Other receiver topologies might be used, such as those described in my co-pending U.S. patent application entitled Ultra-Wide Band Receiver, Application No.  
10       08/044,745, filed April 12, 1993, owned at the time of invention and currently by the same assignee as the present invention. Such application is incorporated by reference in order to teach alternative receiver topologies.

Fig. 7 illustrates a simple head position sensing system  
15       implemented according to the present invention. In this system, a transmitter 500 is mounted on a user's headset 501, worn by a user of a computer system 502. The receiver box 503 is mounted on the computer system 502 and connected across cable 504 to a standard mouse interface. The receiver box 503 includes a first receiver 505, a second  
20       receiver 506 and a third receiver 507 each generating a time-of-flight measurement for pulses generated by the transmitter 501. The receiver box 503 produces data indicating the time-of-flight from the transmitter 500 to each of the three receivers 505, 506, 507 can be used for precise position detection of the transmitter 500 mounted on the headset 501. The  
25       user is tethered by a small diameter coaxial cable 508 to the receiver box 503 to provide timing in the embodiments described. Computer system 502 includes the standard monitor 510 and keyboard 511 and may be used for executing interactive computer programming based on the position data

produced according to the present invention. Various arrangements of the transmitters and receivers may be used to triangulate, providing six axis information: x, y, z in translation and 3 axes of rotation for the transmitter 500.

5           Accordingly, a very high resolution position sensing system has been provided based on direct time-of-flight measurement of radio frequency pulses. The system is simple and highly accurate, greatly improving over prior systems for providing this type of information.

10           The system is capable of providing submillimeter resolution made with components costing less than about \$10.00. The invention can be applied to interactive media systems, robotics, automotive occupant position sensing, digital surgery, and a wide variety of other applications where high resolution position sensing is desired.

15           The foregoing description of preferred embodiments of the invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Obviously, many modifications and variations will be apparent to practitioners skilled in this art. It is intended that the scope of the invention be defined by the following claims and their equivalents.

20           What is claimed is:

CLAIMS

- 1           1.    An apparatus for measuring time-of-flight of an  
2    electromagnetic pulse, comprising:  
3           a transmitter which transmits a sequence of electro-magnetic pulses  
4    in response to a transmit timing signal;  
5           a receiver which samples the sequence of electro-magnetic pulses  
6    with controlled timing, in response to a receive timing signal, and generates  
7    a sample signal in response to the samples;  
8           a timing circuit which supplies the transmit timing signal to the  
9    transmitter and supplies the receive timing signal to the receiver, the  
10   receive timing signal causing the receiver to sample the sequence of  
11   electro-magnetic pulses such that time between transmission of pulses in  
12   the sequence and sampling by the receiver sweeps over a range of delays;  
13   and  
14           a sample detection circuit which in response to the sample signal  
15   and the timing circuit indicates a time-of-flight between the transmitter and  
16   the receiver of pulses in the sequence.
- 1           2.    The apparatus of claim 1, wherein the delays in the range of  
2    delays over which the timing circuit sweeps the time between transmission  
3    of pulses in the sequence and sampling by the receiver vary by less than  
4    100 nanoseconds.
- 1           3.    The apparatus of claim 2, wherein delays in the range of  
2    delays vary by less than 10 nanoseconds.



1           4.     The apparatus of claim 1, wherein the transmit timing signal  
2     causes the transmitter to transmit the sequence of electro-magnetic pulses  
3     at a consistent pulse repetition rate to define a time between pulses, and  
4     the time between pulses is greater than the difference in the delays at the  
5     beginning and the end of the range of delays.

1           5.     The apparatus of claim 1, wherein the transmit timing signal  
2     causes the transmitter to transmit the sequence of electro-magnetic pulses  
3     at a pulse repetition rate, and wherein the receive timing signal sweeps  
4     over the range of delays in a sweep cycle such that pulses in the sequence  
5     are sampled at the pulse repetition rate and with different delays in the  
6     range of delays, such that the sample signal represents magnitude of a  
7     received pulse in the equivalent time.

1           6.     The apparatus of claim 5, wherein the receiver includes  
2     automatic gain control circuitry to control magnitude of the sample signal  
3     in equivalent time.

1           7.     The apparatus of claim 5, wherein the sweep cycle is  
2     repeated at a sweep rate of less than 16 kiloHertz.

1           8.     The apparatus of claim 5, wherein the sweep cycle is  
2     repeated at a sweep rate of less than 100 Hertz.

1           9.     The apparatus of claim 7, wherein the pulse repetition rate is  
2     greater than about 1 megaHertz.

1           10.    An apparatus for detecting position of an object, comprising:  
2           a transmitter, for placement on the object, which transmits a  
3           sequence of electro-magnetic pulses in response to a transmit timing  
4           signal;  
5           a receiver which samples the sequence of electro-magnetic pulses  
6           with controlled timing, in response to a receive timing signal, and generates  
7           a sample signal in response to the samples;  
8           a timing circuit which supplies the transmit timing signal to the  
9           transmitter and supplies the receive timing signal to the receiver, the  
10          receive timing signal causing the receiver to sample the sequence of  
11          electro-magnetic pulses such that time between transmission of pulses in  
12          the sequence by the transmitter and sampling by the receiver sweeps over  
13          a range of delays; and  
14          a pulse detection circuit which in response to the sample signal and  
15          the timing circuit generates a pulse detect signal when the sample signal  
16          reaches a threshold during a sweep; and  
17          a signal processor, coupled with the pulse detection circuit, to  
18          indicate a position of the object in response to the pulse detect signal.

1           11.    The apparatus of claim 10, wherein the pulse detect signal  
2           indicates receipt of a transmitted pulse propagated directly from the  
3           transmitter.

1           12. The apparatus of claim 10, wherein the timing circuit includes:  
2           a pulse rate clock;  
3           a cable, having cable delay time, connecting the pulse rate clock to  
4           the transmitter;  
5           a circuit located at the transmitter which translates the pulse rate  
6           clock from the cable into the transmit timing signal; and  
7           a controlled delay circuit, coupled with the pulse rate clock, which  
8           produces the receive timing signal at the receiver in response to the pulse  
9           rate clock delayed in time to compensate for the cable delay.

1           13. The apparatus of claim 10, wherein the timing circuit includes  
2           an oscillator producing a pulse clock, a circuit which transmits the pulse  
3           clock to the transmitter with a known propagation delay as the transmit  
4           timing signal, and a controllable delay circuit receiving the pulse clock and  
5           producing the receive timing signal delayed in time by a controllable  
6           amount in a sweep over a range beginning near a time corresponding to  
7           the known propagation delay and ending near a maximum predicted range  
8           of time-of-flight for an electromagnetic pulse from the transmitter to the  
9           receiver.

1           14. The apparatus of claim 13, wherein the signal processor  
2           comprises a counter which counts at a count rate from a beginning of the  
3           sweep until generation of the pulse detect signal to generate a counter  
4           output indicating a position of the transmitter.

1           15.   The apparatus of claim 13, wherein the controllable delay  
2           circuit includes a voltage controlled delay circuit having a control input, and  
3           a voltage ramp generator coupled to the control input of the voltage  
4           controlled delay circuit to sweep the receive timing signal.

1           16.   The apparatus of claim 15, wherein the voltage ramp  
2           generator comprises a digital to analog converter.

1           17.   The apparatus of claim 15, wherein the voltage ramp  
2           generator comprises an analog exponential ramp generator, and the  
3           voltage controlled delay circuit produces a delay which is an exponential  
4           function of voltage on the control input.

1           18.   The apparatus of claim 10, wherein the receiver includes an  
2           automatic gain control circuit.

1           19.   The apparatus of claim 10, wherein the transmit timing signal  
2           causes the transmitter to transmit the sequence of electro-magnetic pulses  
3           at a pulse repetition rate, and wherein the receive timing signal sweeps  
4           over the range of delays in a sweep cycle such that pulses in the sequence  
5           are sampled at the pulse repetition rate and with different delays in the  
6           range of delays, such that the sample signal represents magnitude of a  
7           received pulse in the equivalent time.

1           20.   The apparatus of claim 19, wherein the receiver includes  
2           automatic gain control circuitry to control magnitude of the sample signal  
3           in equivalent time.

1           21.   The apparatus of claim 19, wherein the sweep cycle is  
2           repeated at a sweep rate of less than 16 kiloHertz.

1           22.   The apparatus of claim 19, wherein the sweep cycle is  
2           repeated at a sweep rate of less than 100 Hertz.

1           23.   The apparatus of claim 21, wherein the pulse repetition rate  
2           is greater than about 1 megaHertz.

1           24.   The apparatus of claim 10, including at least one additional  
2           receiver spaced away from the other receiver, and coupled to the timing  
3           circuit and the signal processor, which generates an additional sample  
4           signal.

1           25.   An apparatus for detecting position of an object, comprising:  
2           a transmitter, for placement on the object, which transmits a  
3           sequence of microwave pulses in response to a transmit timing signal with  
4           a pulse repetition rate greater than about 1 megaHertz;  
5           a receiver having an antenna, a sample gate coupled to the  
6           antenna, which samples which samples a signal on the antenna at the  
7           pulse repetition rate and with controlled timing in response to a receive  
8           timing signal, and an amplifier coupled to the sample gate including  
9           automatic gain control such that pulses in the sequence are sampled to  
10          generate an equivalent time sample signal;  
11          a timing circuit which supplies the transmit timing signal to the  
12          transmitter and supplies the receive timing signal to the receiver, the  
13          receive timing signal causing the receiver to sample the sequence of  
14          electro-magnetic pulses such that time between transmission of pulses in

15 the sequence by the transmitter and sampling by the receiver sweeps over  
16 a range of delays varying by less than 20 nanoseconds in a sweep  
17 duration of greater than about 10 milliseconds; and  
18 a signal processor, coupled with the receiver, to indicate a position  
19 of the object within a range of less than 10 feet in response to the  
20 equivalent time sample signal.

1 26. The apparatus of claim 25, wherein the signal processor  
2 samples the equivalent time sample signal at a rate of greater than 1  
3 megaHertz.

1 27. The apparatus of claim 25, including at least one additional  
2 receiver spaced away from the other receiver, and coupled to the timing  
3 circuit and the signal processor, which generates an additional equivalent  
4 time sample signal.

1 28. A method for detecting position of an object at a range of less  
2 than 10 feet, comprising:  
3 mounting a transmitter on the object;  
4 transmitting from the transmitter a sequence of electromagnetic  
5 pulses;  
6 detecting time-of-flight of the electromagnetic pulses from the  
7 transmitter to a receiver; and  
8 processing the time-of-flight to indicate position of the object.

1 29. The method of claim 28, wherein the time-of-flight is less than  
2 10 nanoseconds.

1           30. The method of claim 28, wherein the step of detecting time-  
2 of-flight includes:  
3           sampling the sequence of pulses with controlled timing to produce  
4 an equivalent time representation of a transmitted pulse at the receiver;  
5 and  
6           processing the equivalent time signal to indicate the time-of-flight.

1           31. The method of claim 30, further including:  
2           synchronizing the transmitting and sampling steps by supplying a  
3 reference clock to the transmitter across a timing cable having a  
4 predictable delay, and controlling the timing of the sampling step in  
5 response to the reference clock and the predictable delay.

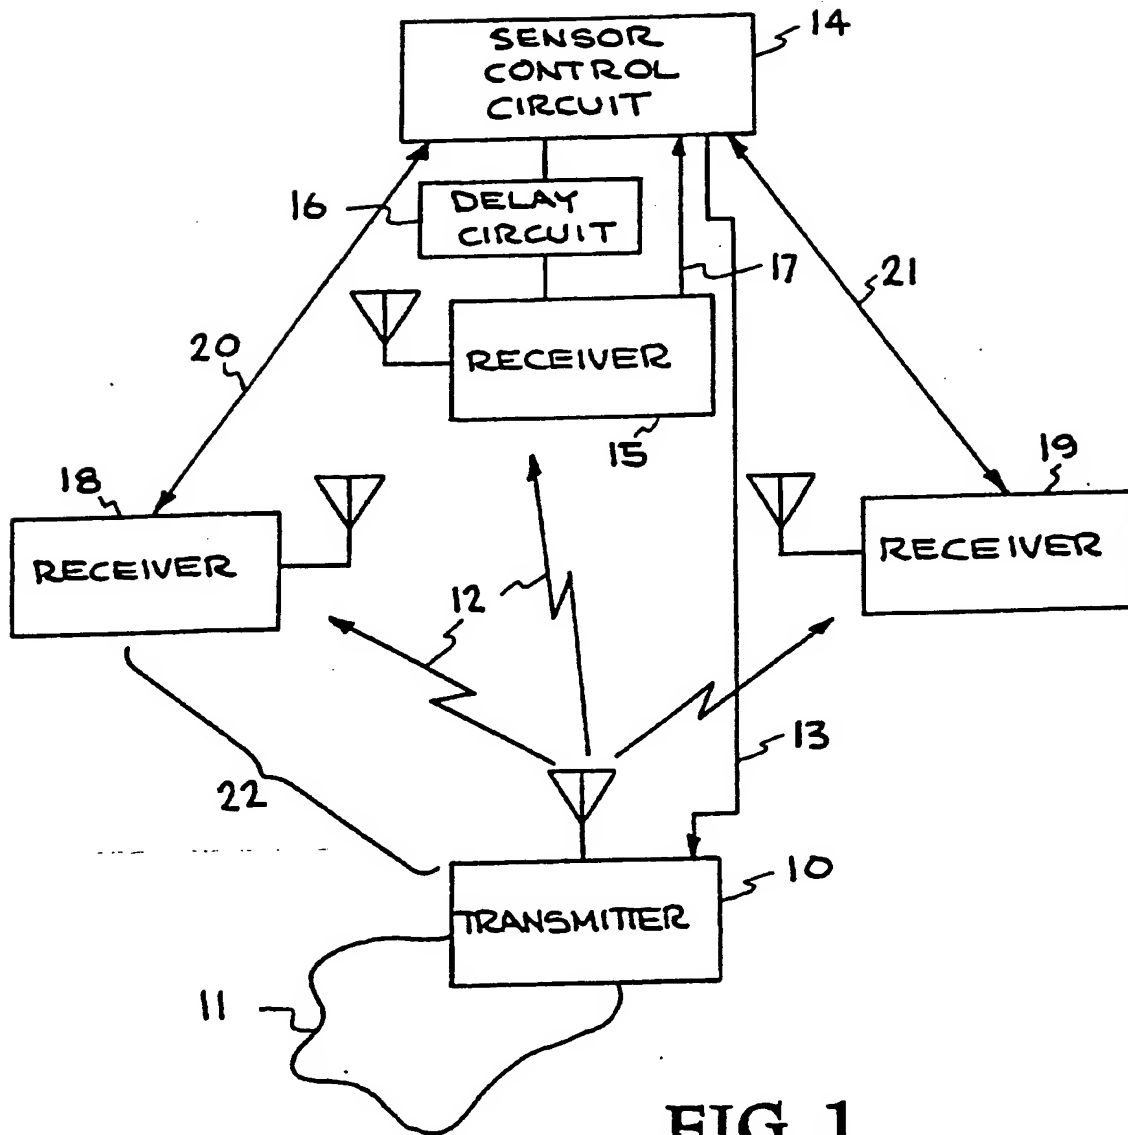


FIG. 1



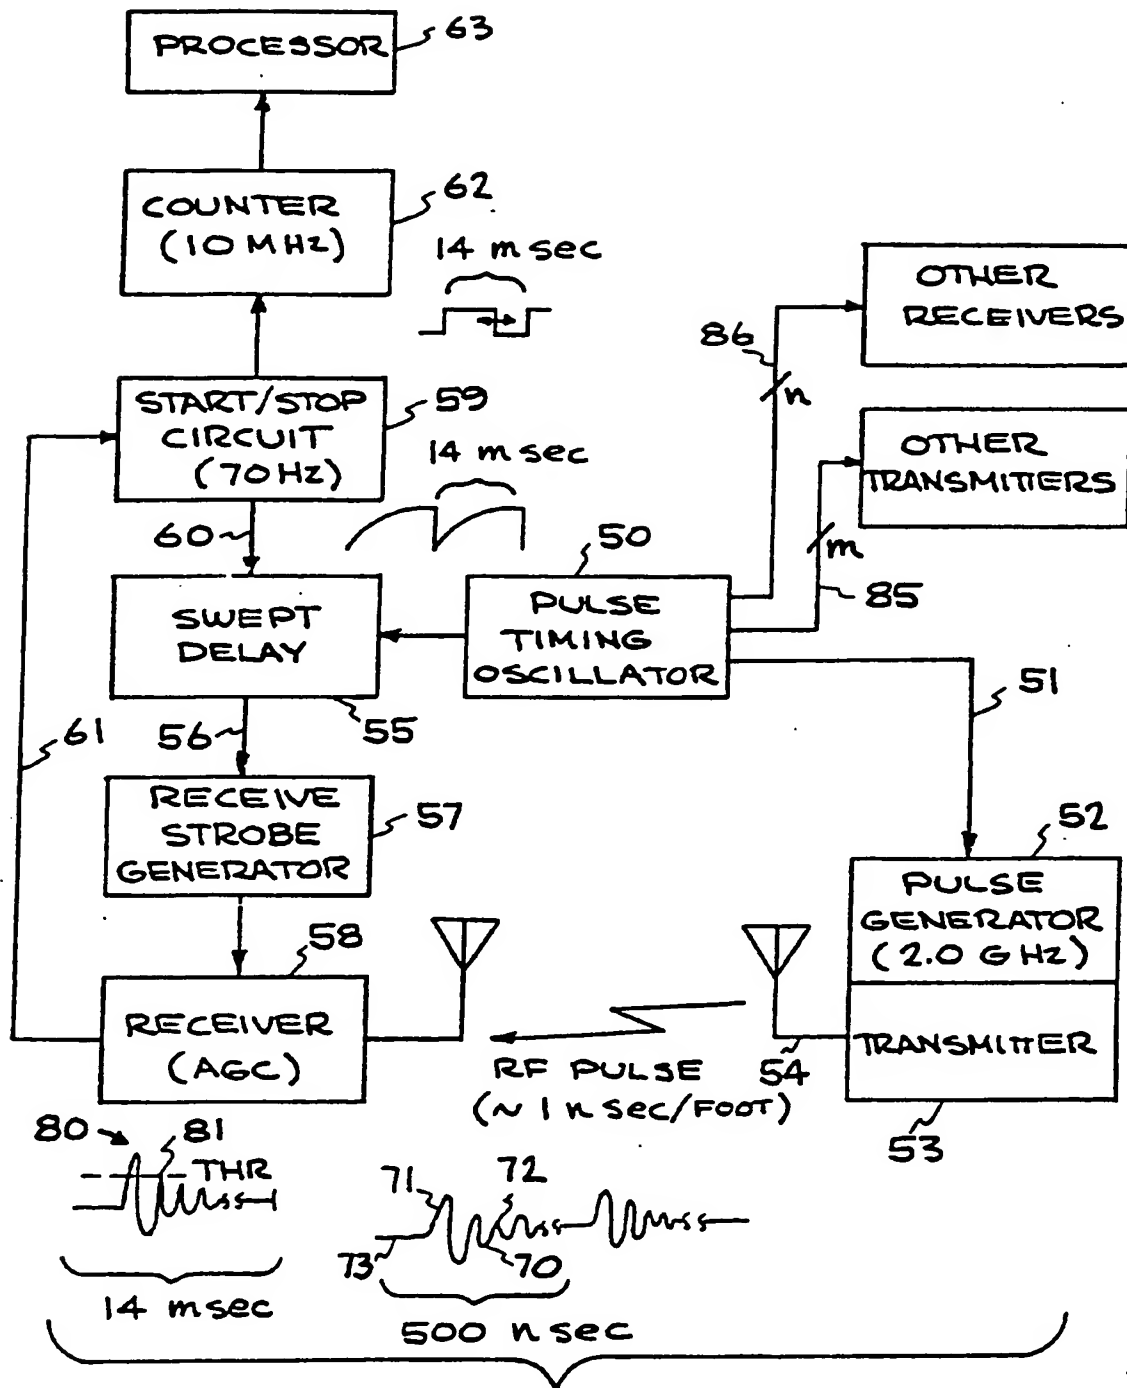


FIG. 2

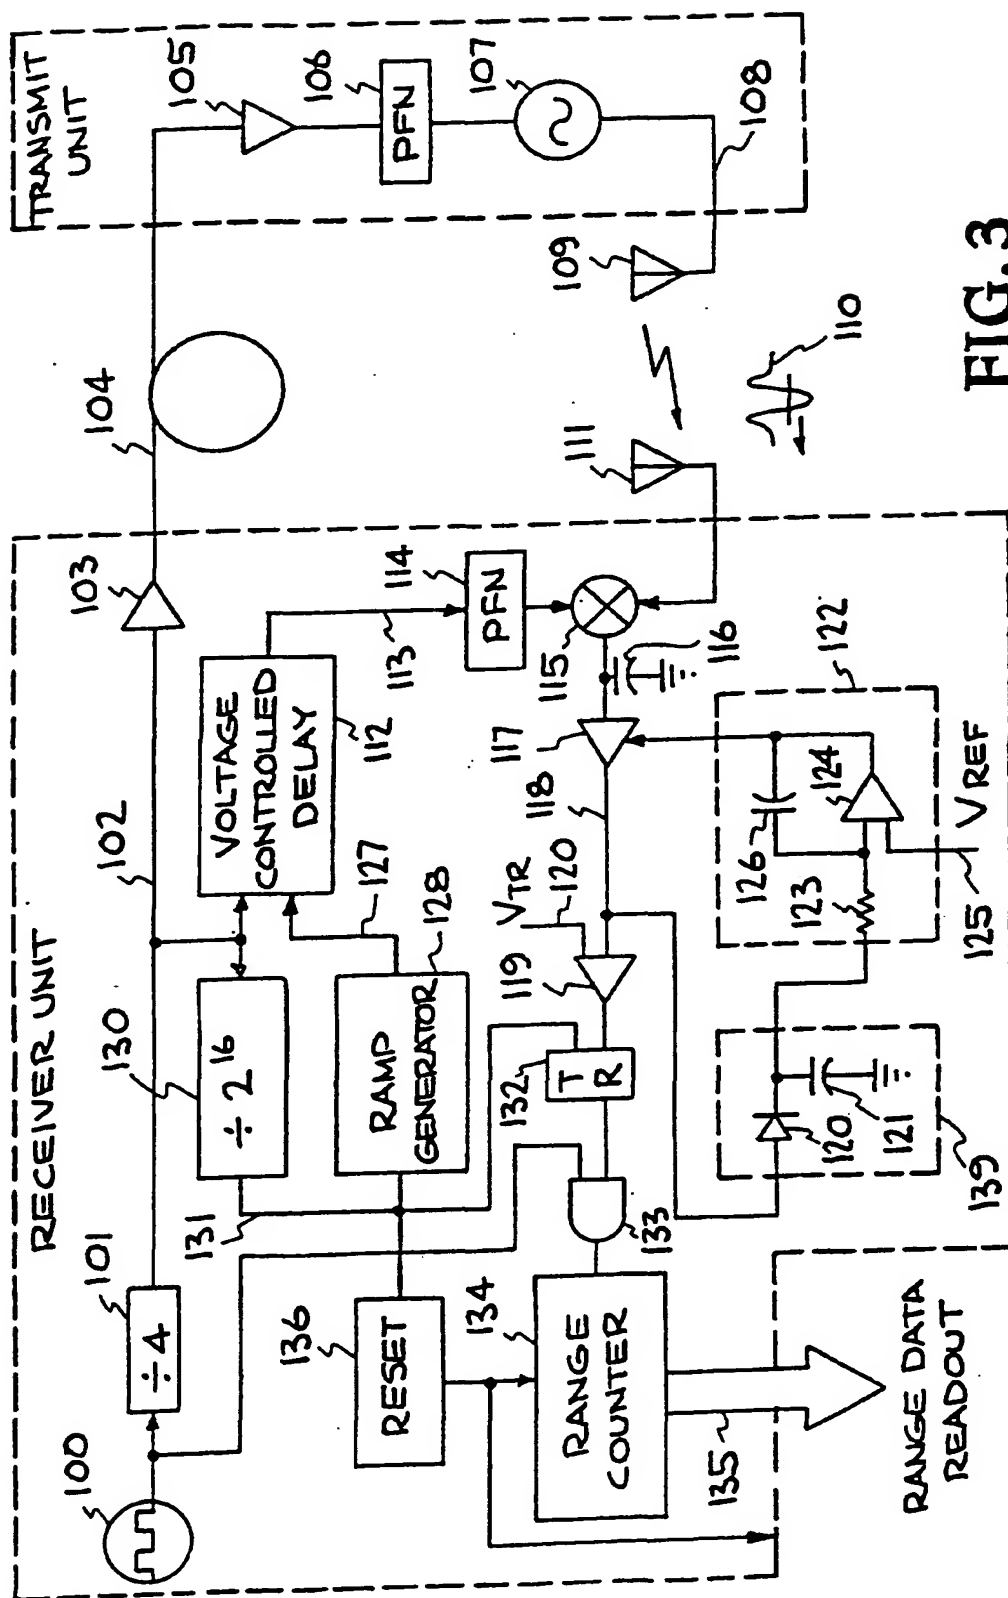


FIG. 3

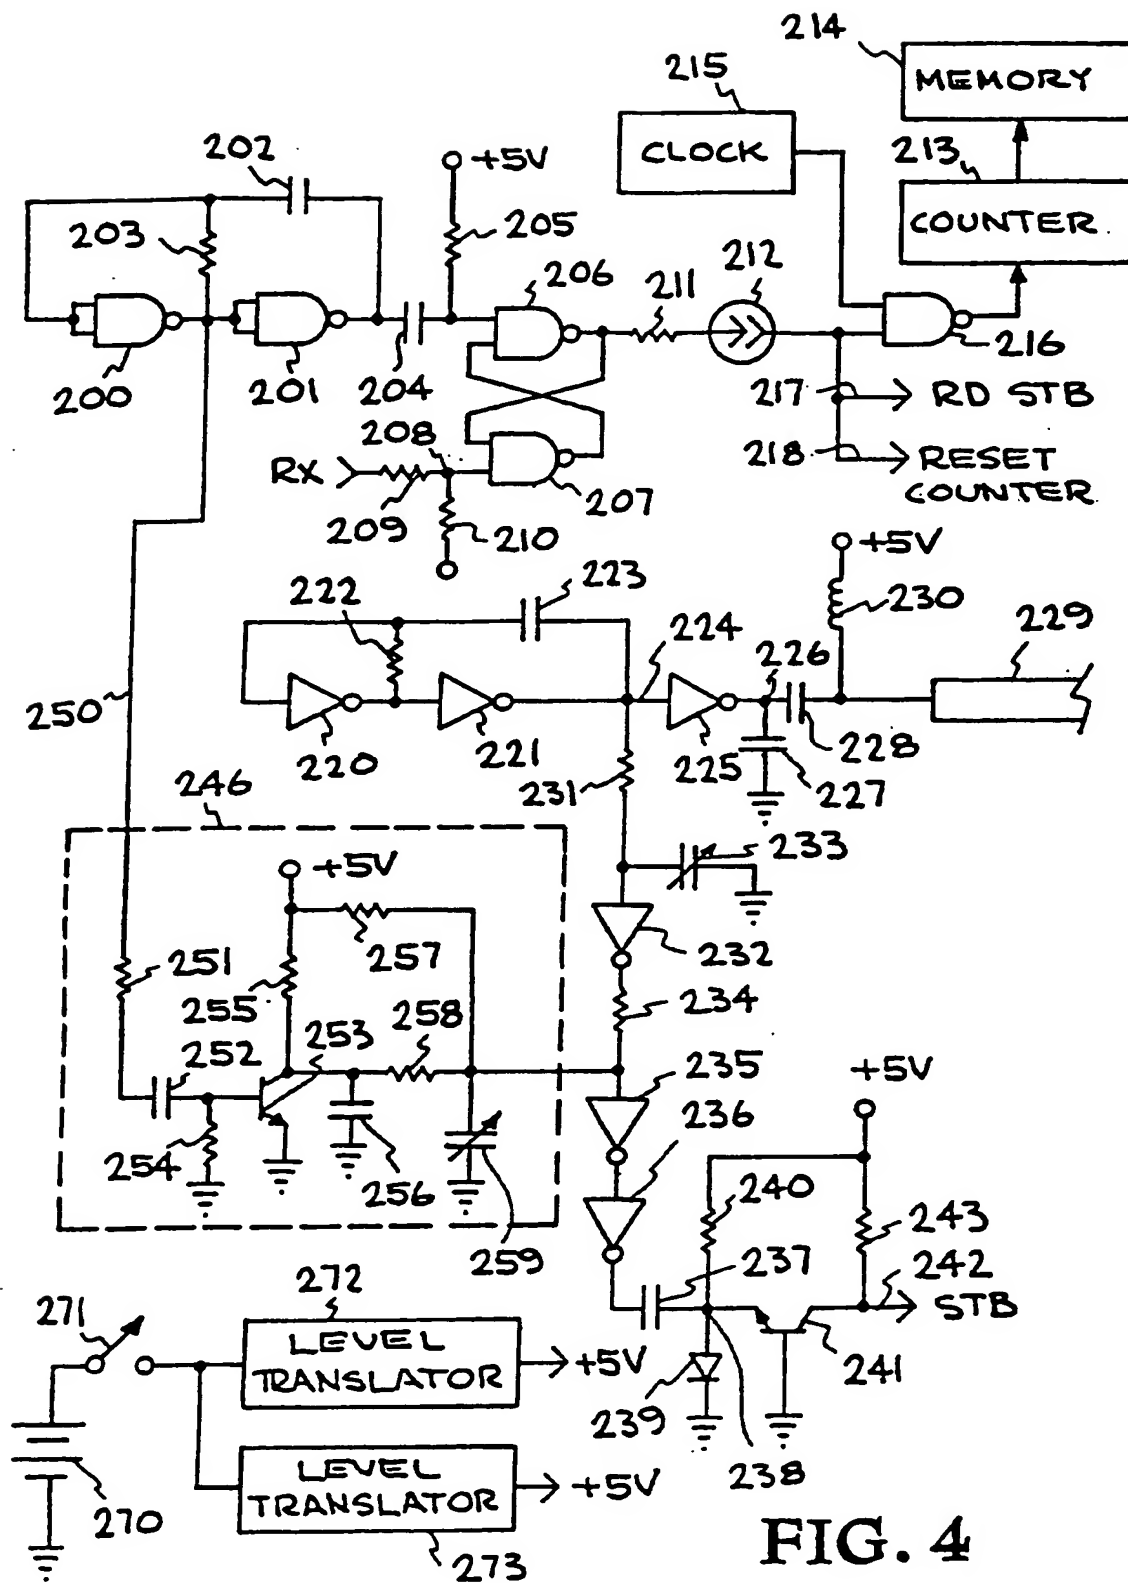


FIG. 4

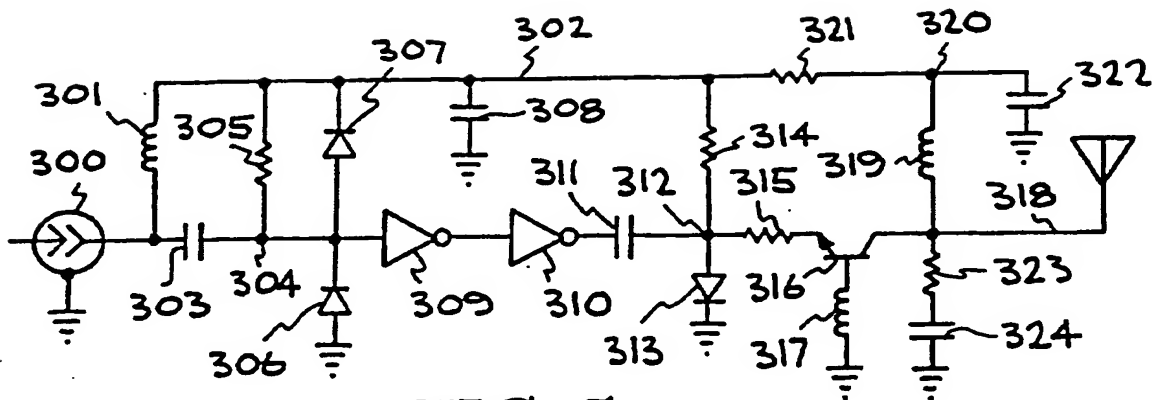


FIG. 5

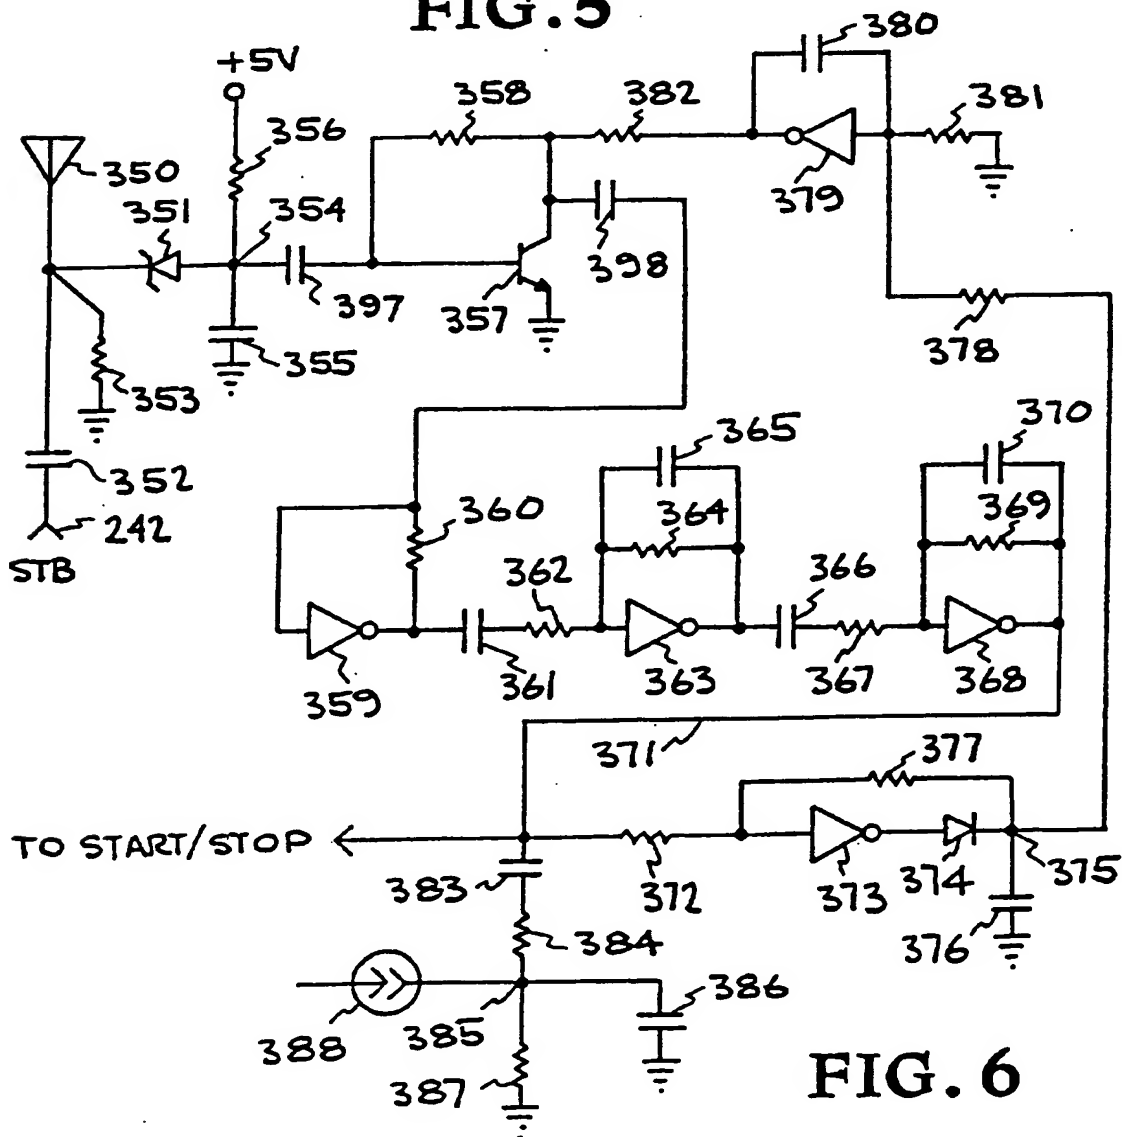


FIG. 6

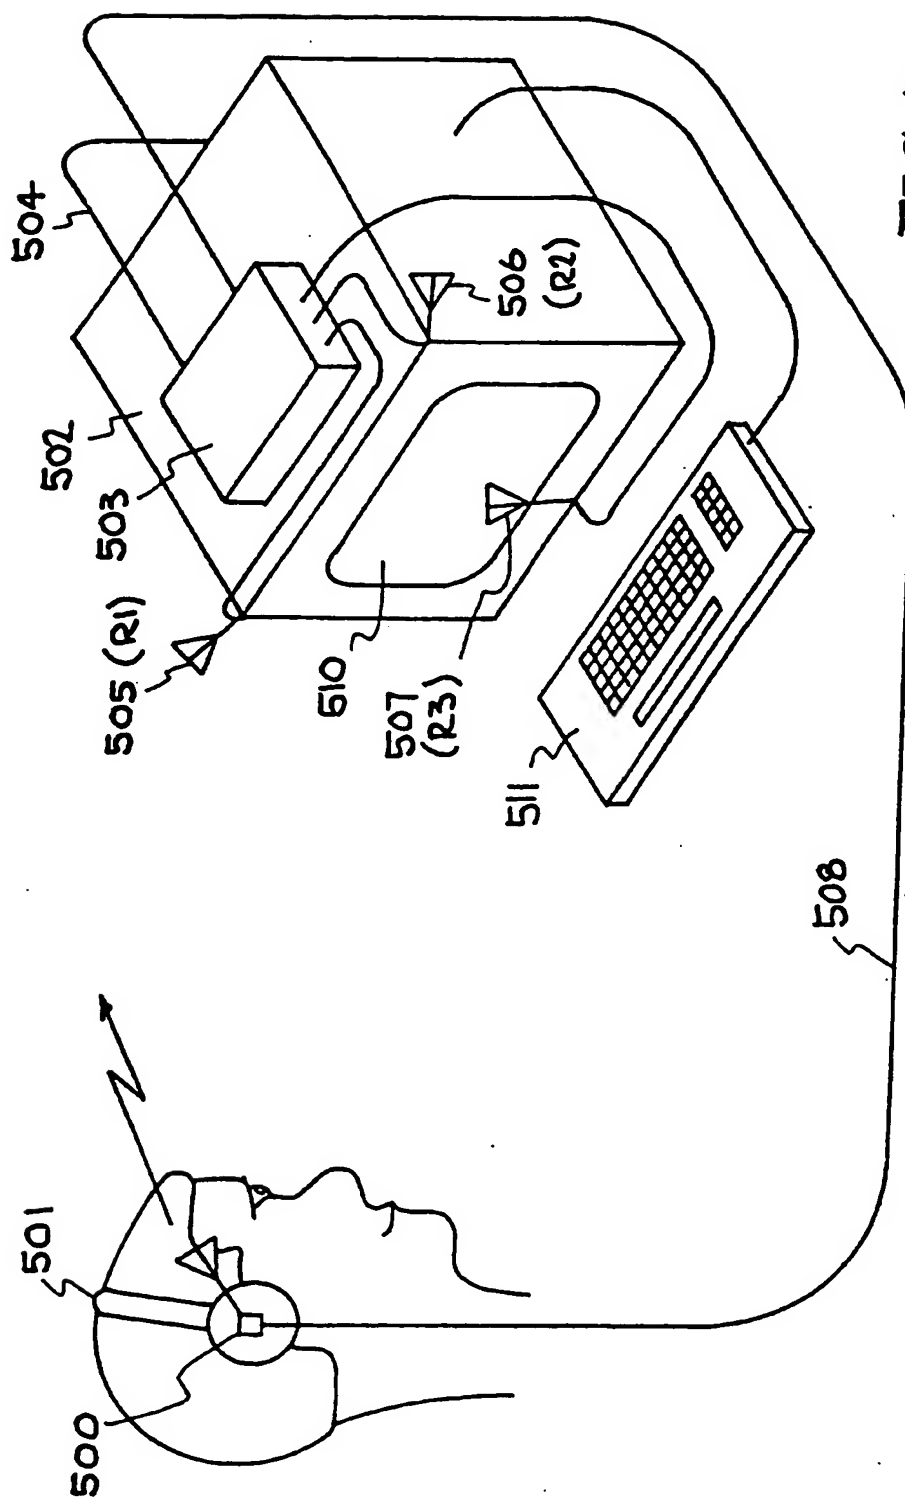


FIG. 7

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US95/11047

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G01S 1/24  
US CL : 342/368, 389, 465;  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 342/368, 389, 465;  
342/387, 388, 389, 391, 386, 465, 82, 125

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 5,216,429 (NAKAGAWA ET AL) 01 JUNE 1993; Fig. 1; abstract	28-31
X	US, A, 3,680,121 (ANDERSON ET AL) 25 JULY 1972; fig. 3; fig. 2; col. 3, line 46-51; abstract; col. 3, lines 65-68	28-31
A	US, A, 3,687,556 (PRICE ET AL) 29 AUGUST 1972	
A, E	US, A, 4,543,580 (BENT ET AL) 24 SEPTEMBER 1995	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	* T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* A		document defining the general state of the art which is not considered to be of particular relevance
* E		earlier document published on or after the international filing date
* L		document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
* O		document referring to an oral disclosure, use, exhibition or other means
* P		document published prior to the international filing date but later than the priority date claimed
	* X	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
	* Y	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
	* Z	document member of the same patent family

Date of the actual completion of the international search

17 OCTOBER 1995

Date of mailing of the international search report

27 DEC 1995

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

DAO L. PHAN

Telephone No. (703) 308-0462